

PF6204D

- CONVECTION OVEN 4 TRAYS 442X325 CABOTO DIGITAL

PIRON
your professional cooking

rev: PF6204D




Load Capacity		n°4 - 442X325 - GN 2/3
Space between trays		78 mm
WxDxH - Width x Depth x Height		60x68x54 cm
Nominal power	kW	3.1 kW
Heating power		1x3000W @ 230V
Motor power		1x80W @230V
N° motor speed phases		1
Reverse		Reverse Air Flow
Nominal voltage		230V 1N~
Nominal Current		14 A
Plug type		Schuko
Cable provided		3x2.5 mm² H07RN-F
Frequency		50/60 Hz
Cooking phases		3
N° cooking programs		99
Cooking chamber material		Inox AISI430
Timer		0 - 16h
Humidity/Steaming		•
Temperature		30 - 260 °C
Pre-heating		260 °C
Waterproof level		IPx4
Net weight		37 kg
WxDxHi - Width x Depth x Height - Box		66x76x59 cm
Stacking		6



PF6204D

- CONVECTION OVEN 4 TRAYS 442X325 CABOTO DIGITAL

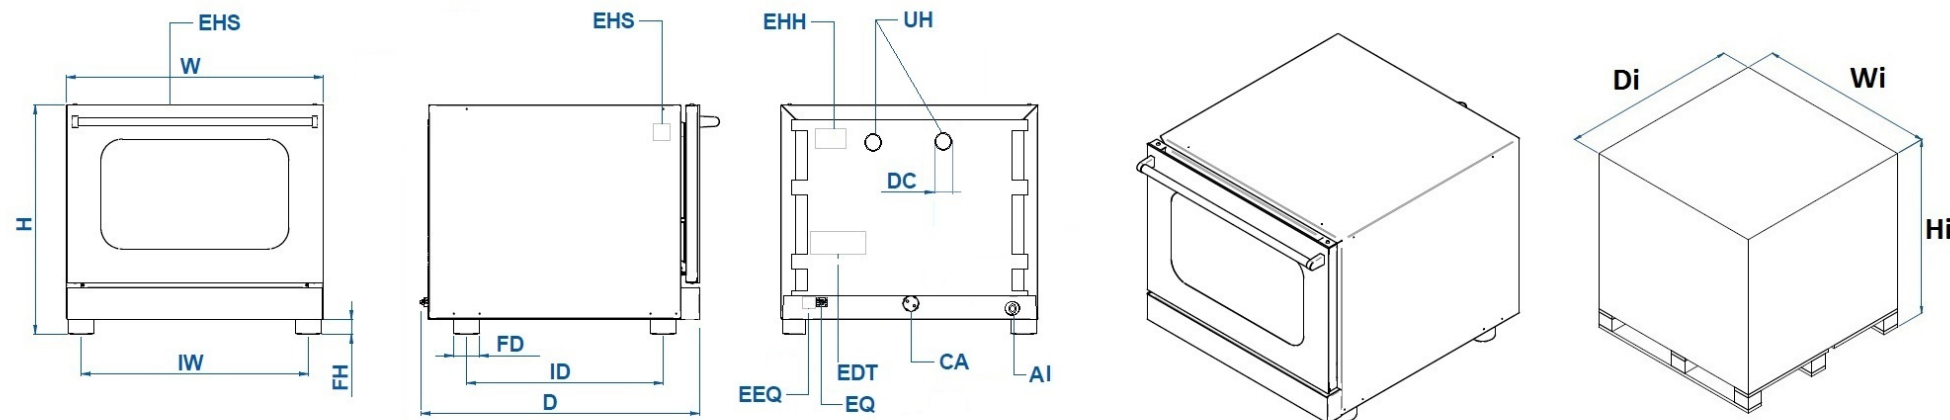

UH - Exhaust hot fumes
UA - Cooling air exit
CA - Power Cord
EQ - Equipotential terminal
EHS - Hot surface label
EDT - Datasheet label
AI - Water in


AU - Water out
EAI - Water in label
UC - Non-return valve
RF - Junction Ø8 - 3/4
RG - Junction Ø8 - Ø8 90°
EEQ - Equipotential label
EHH - Exhaust hot fumes label

IW : 53 cm
ID : 46 cm
FD : Ø 5.2mm
FH : 3,5 cm
DC : Ø 3 cm
HH : -
DS : -

Wheelbase feet - width
Wheelbase feet - deep
Ø feet
Feet height
Ø exhaust pipe
Hinge height
Ø water out pipe

PF6204D

- CONVECTION OVEN 4 TRAYS 442X325 CABOTO DIGITAL

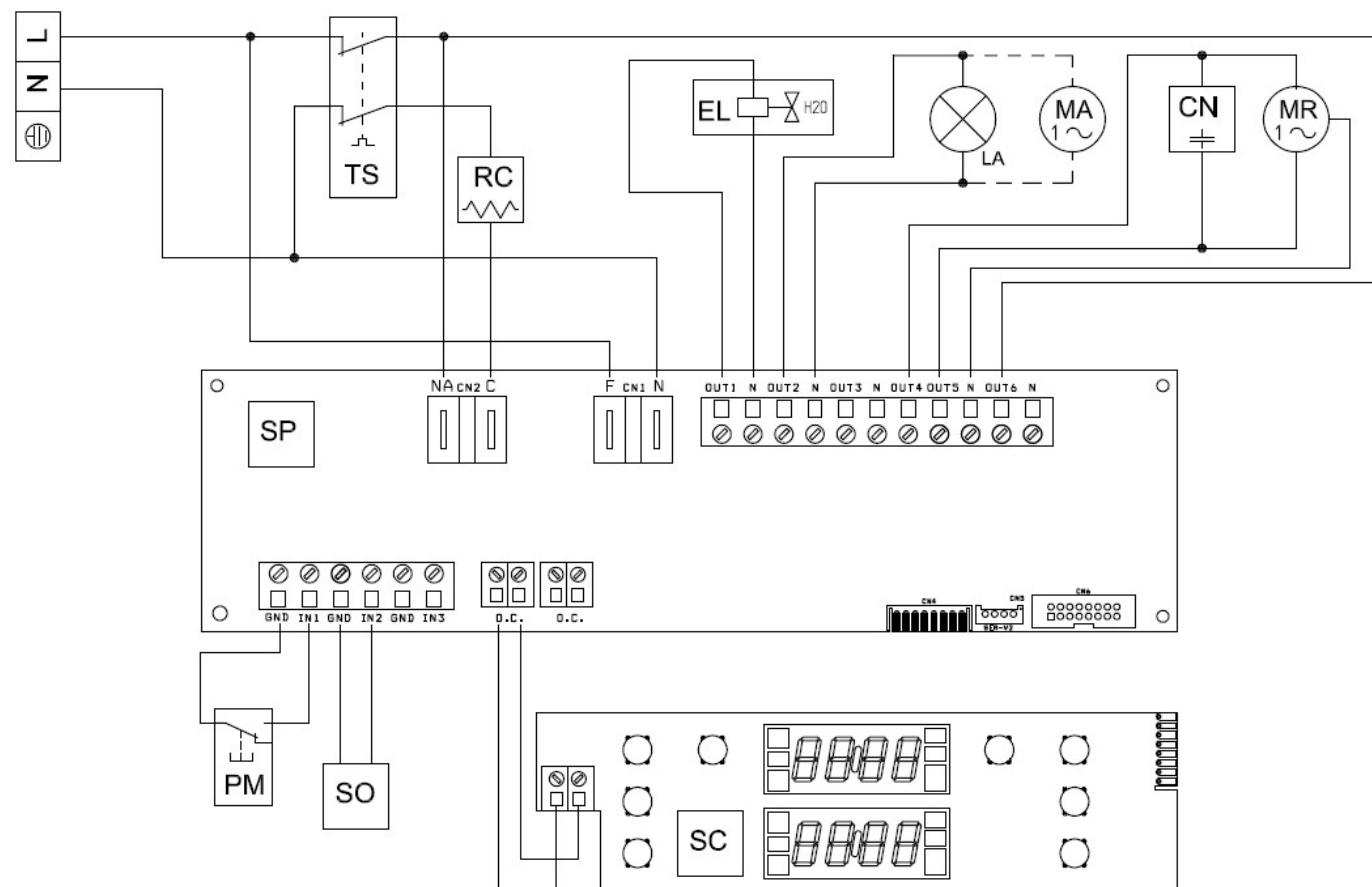

B - Buzzer
CA - Power Cord
CPC - Power-Control Link Cable
DLC - Automatic Lock Cable
C - Function Switch
CN - Capacitor
EL - Humidity Solenoid Valve
SF - Safety Fuse
PSW - Power Switch

RE - Inverter
LA - Chamber Lamp
PT - Throttle Switch
PC - Trolley Switch
PM - Door Switch
TB - Terminal Block
MA - Axial Motor
MR - Radial Motor
MT - Tangential Motor

TGM - Throttle Gear Motor
PB - Rinse Pump
PD - Cleaner Pump
RL - Auxiliary Relay
RG - Grill Heating Element
RC - Circular Heating Element
SC - Electronic Control Board
SP - Electronic Power Board
SG - Motor Speed Sensor

CP - Core probe
SO - Chamber Probe
SV - Power Pilot Light
ST - Temperature Pilot Light
PU - Humidity Button
IT - Contactor
TM - Motor Thermal Cut-Out
T - Chamber Thermostat
TS - Thermal Cut-Out

TI - Timer
RSS - Top Heating Element
RSI - Bottom Heating Element
DI - Display
SCA - Electronic Board Carrier
SD - Electronic Board Display
PS - Power Supply
TFM - Transformer
PRS - Pressure switch

PF6204D

- CONVECTION OVEN 4 TRAYS 442X325 CABOTO DIGITAL

PIRON
your professional cooking

