

> IM-65A

Daily ice production capacity up to 70 KG



The Hoshizaki cube is characterized by its clean edges and its transparency streaked by a marbling effect. When the CELL WALLS block the freezing water's expansion from all sides, while reaching up to -30°C during the cubing process. As the temperatures go down, the water keeps expanding and marbles start to form as a sign of extreme density and compactness of every single cube.



FEATURES

- > Zero clearance rear design for easy installation
- > Round front door and easy access to ice
- > Pull out air filter design for easy cleaning
- > Front water valve access for easy servicability
- > Stainless steel exterior provides hygienic and high qualified finish

ICE SIZE 32mm 28mm 25mm

MARBLE EFFECT




- > Individual cube > Impurity free
- > Hardest ice to enjoy slow melting and dilution of drinks


CERTIFICATION





DIMENSIONS & SPECIFICATION



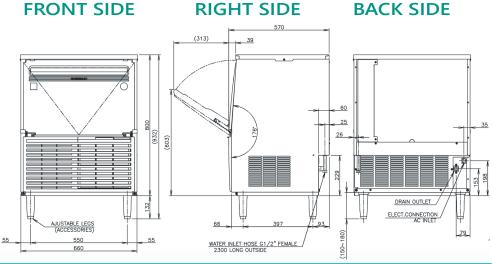

IM-65A		
ICE DIMENSIONS (WxDxH)	28 x 28 x 32mm (Standard size) 25 x 25 x 23mm (25mm size)	
DIMENSIONS (WxDxH)	660 x 570 x 800 mm	
PACKAGE DIMENSIONS (WxDxH)	760 x 680 x 970 mm	
WEIGHT (NET/GROSS)	60 KG / 74 KG	
AMPERAGE / STARTING AMPERAGE	2.7 A / 13 A	
ELECTRICAL CONSUMPTION (AT32°C/WT21°C)	390 W	
REFRIGERANT CHARGE	R134a / 260g	
HEAT REJECTION (AT32°C/WT21°C)	910 W 783kcal/h	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	70 KG
	(AT21°C/WT15°C)	62 KG
	(AT32°C/WT21°C)	49 KG
ICE PRODUCTION PER CYCLE (AT32°C/WT21°C)	Approx. 0.94 KG / 42 pcs FREEZE CYCLE TIME PER CYCLE 29 minutes	
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)	0.12 m³ ≈ 2.4 L / 1 KG ice	

NOTE:

OPERATING CONDITIONS:

All dimensions indicated are Width x Depth x Height in mm *60Hz units are avaialbe on request

• Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C• Water Supply: 5°-35°C / 0.07-0.78 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50Hz